

# GLAZING

## GLASS PACKING

All glazing should be in accordance with BS6262 and all current codes of practice.

Position the glazing packers as illustrated in Fig 13.1.

**Note:** 'Toe and heel' the packers on side hung windows to ensure good operation of the window.

When packing with cavity locking blocks or GT Stayguards fitted, packers should be placed at this position to eliminate deflection of the frame.

Packers are also placed at the locking points to give extra security from forced entry.

When openers are adjacent to fixed lights, packers are also put in the fixed light next to the locking points to prevent deflection of the transom or mullion. See fig 13.2.

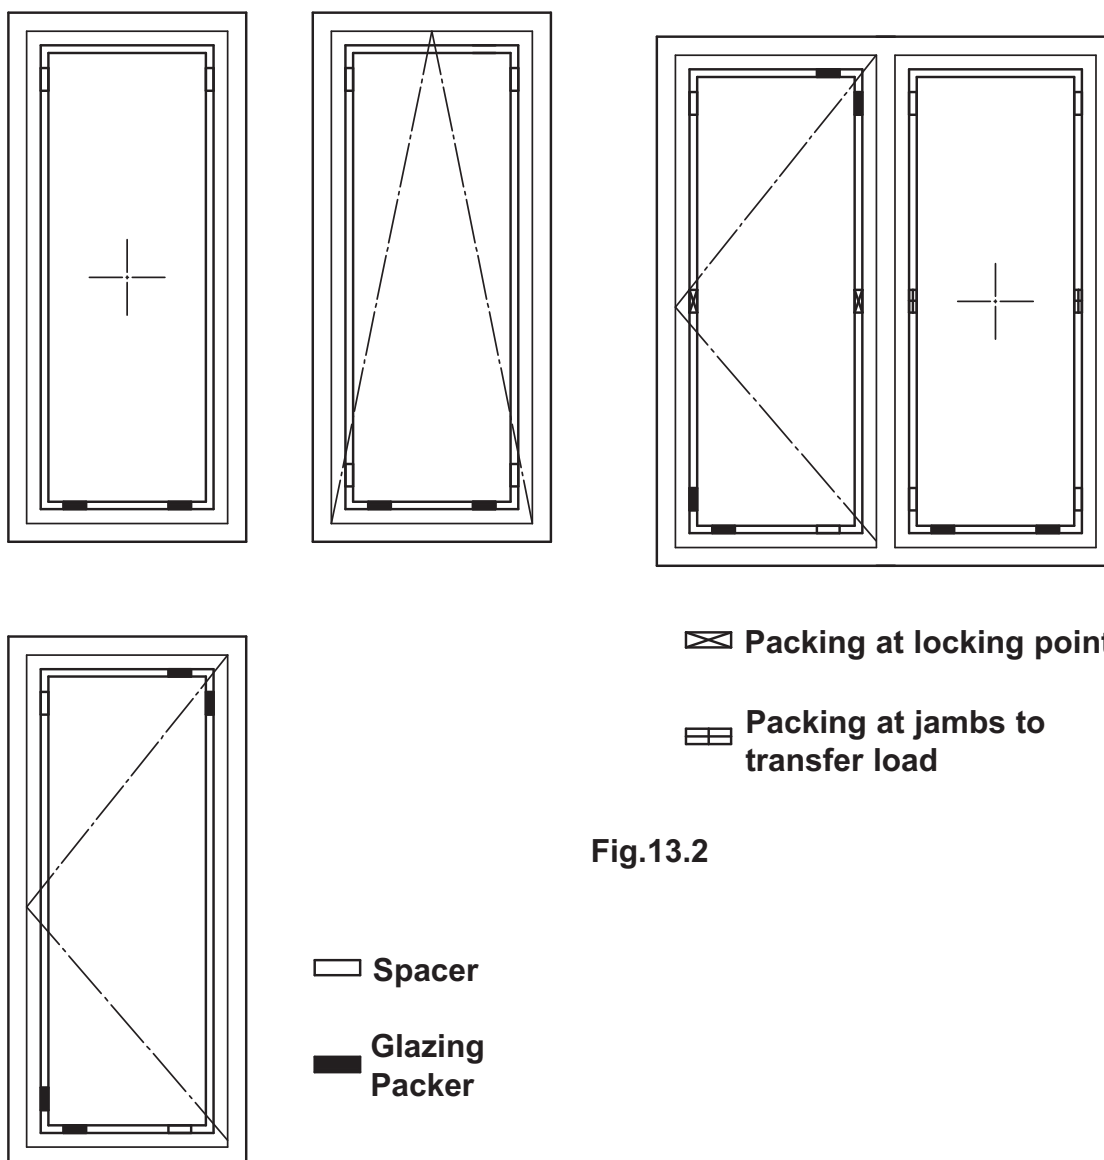


Fig. 13.1

Fig.13.2