
GLAZING

GLASS PACKING




All glazing should be in accordance with BS6262 and all current codes of practice.

Position the glazing packers as illustrated in Fig 13.1

Note: 'Toe and heel' the packers to ensure good operation of the door.

Packers are also placed at the locking points to give extra security from forced entry.

When openers are adjacent to fixed lights, packers are also put in the fixed light next to the locking points to prevent deflection of the mullion. See fig 13.2.

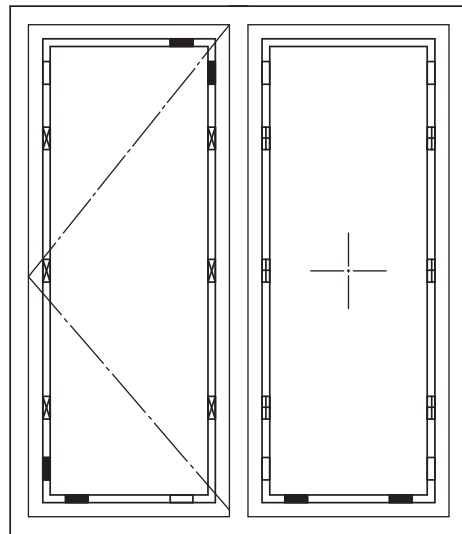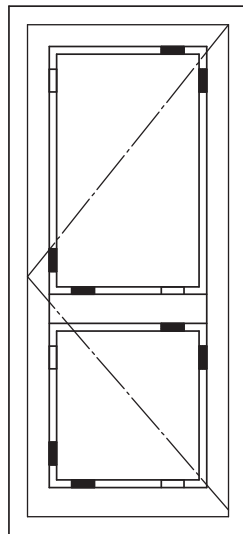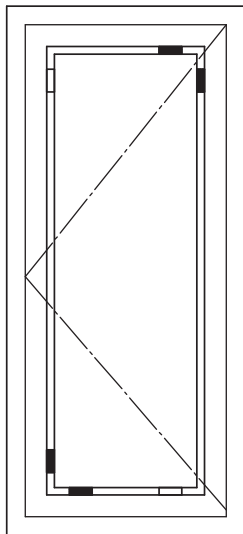

□ Spacer

■ Glazing
Packer

⊗ Packing at locking points

▤ Packing at jambs to
transfer load

Fig.13.1

Fig13.2